


## Digital Transistors (Built-in Resistors)

- **Equivalent Circuit**

DIGITAL TRANSISTOR (NPN)


### FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

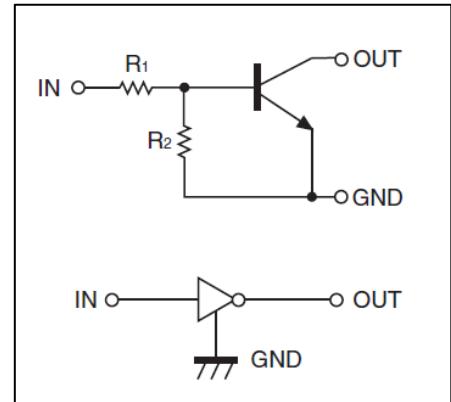

### PIN CONNECTIONS and MARKING


**DTC113ZE**



**SOT-523**

1. IN  
2. GND  
3. OUT


**DTC113ZUA**



**SOT-323**

1. IN  
2. GND  
3. OUT


**DTC113ZCA**



**SOT-23**

1. IN  
2. GND  
3. OUT

**DTC113ZKA**



**SOT-23-3L**

1. IN  
2. GND  
3. OUT

## ORDERING INFORMATION

Part Number	MARKING <sup>(1)</sup>	Package	Packing Method	Pack Quantity
DTC113ZE	E21	SOT-523	Reel	3000pcs/Reel
DTC113ZUA	E21	SOT-323	Reel	3000pcs/Reel
DTC113ZKA	E21	SOT-23-3L	Reel	3000pcs/Reel
DTC113ZCA	E21	SOT-23	Reel	3000pcs/Reel

Notes: (1). Solid dot= Green molding compound device, if none, the normal device.

(2). XXX=Code

## MAXIMUM RATINGS(Ta=25°C unless otherwise noted)

Symbol	Parameter	Limits(DTC113Z□)						Unit
		M	E	UA	CA	KA	SA	
V <sub>cc</sub>	Supply Voltage			50				V
V <sub>IN</sub>	Input Voltage			-5~+10				V
I <sub>O</sub>	Output Current			100				mA
P <sub>D</sub>	Power Dissipation	100	150	200	200	200	300	mW
T <sub>J,T<sub>stg</sub></sub>	Operation Junction and Storage Temperature Range			-55~+150				°C

## ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	V <sub>I(off)</sub>	V <sub>cc</sub> =5V,I <sub>O</sub> =100μA	0.3			V
	V <sub>I(on)</sub>	V <sub>O</sub> =0.3V,I <sub>O</sub> =20mA			3	V
Output voltage	V <sub>O(on)</sub>	I <sub>O</sub> /I <sub>I</sub> =10mA/0.5mA			0.3	V
Input current	I <sub>I</sub>	V <sub>I</sub> =5V			7.2	mA
Output current	I <sub>O(off)</sub>	V <sub>cc</sub> =50V,V <sub>I</sub> =0			0.5	μA
DC current gain	G <sub>I</sub>	V <sub>O</sub> =5V,I <sub>O</sub> =5mA	33			
Input resistance	R <sub>I</sub>		0.7	1	1.3	kΩ
Resistance ratio	R <sub>2</sub> /R <sub>1</sub>		8	10	12	
Transition frequency	f <sub>T</sub>	V <sub>O</sub> =10V ,I <sub>O</sub> =5mA,f=100MHz		250		MHz

## Typical Characteristics

