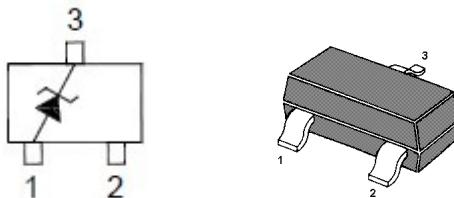


**BAT400D**
**SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER**


1.ANODE 3.CATHODE

 Marking Code: **PK**  
 SOT-23 Plastic Package

**Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )**

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	$V_{RRM}$	40	V
Working Peak Reverse Voltage	$V_{RWM}$	40	V
DC Blocking Voltage	$V_R$	40	V
RMS Reverse Voltage	$V_{R(RMS)}$	28	V
Average Rectified Current	$I_o$	0.5	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	3	A
Power Dissipation	$P_d$	480	mW
Typical Thermal Resistance, Junction to Ambient Air	$R_{\theta JA}$	286	°C/W
Operating and Storage Temperature Range	$T_{opr}, T_s$	- 40 to +125	°C

**Characteristics at  $T_a = 25^\circ\text{C}$** 

Parameter	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage at $I_F = 10 \text{ mA}$ at $I_F = 500 \text{ mA}$	$V_F$	-	-	0.3 0.55	V
Reverse Breakdown Voltage at $I_R = 1 \text{ mA}$	$V_{(BR)R}$	40	-	-	V
Reverse Current at $V_R = 10 \text{ V}$ at $V_R = 30 \text{ V}$	$I_R$	-	-	30 50	µA
Total Capacitance at $V_R = 0 \text{ V}$ , $f = 1 \text{ MHz}$ at $V_R = 10 \text{ V}$ , $f = 1 \text{ MHz}$	$C_{tot}$	-	125 20	-	pF

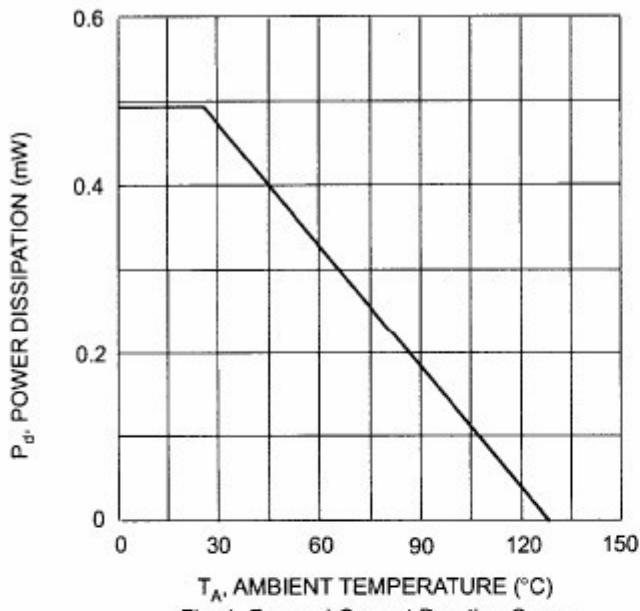


Fig. 1 Forward Current Derating Curve

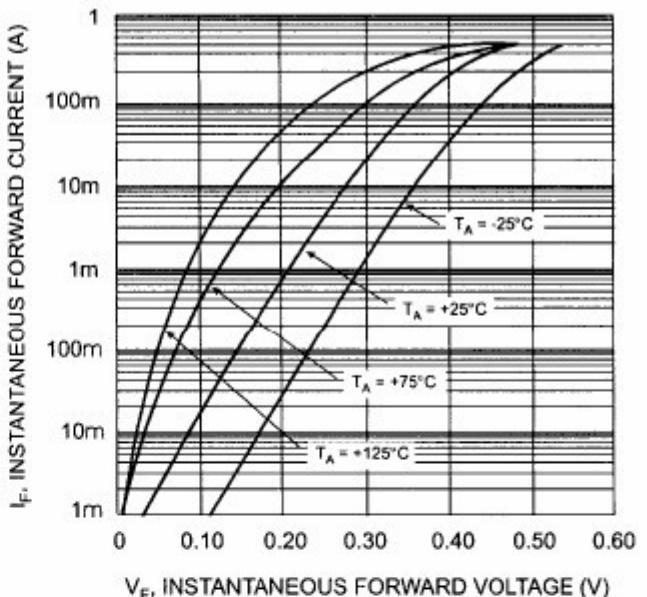


Fig. 2 Typical Forward Characteristics

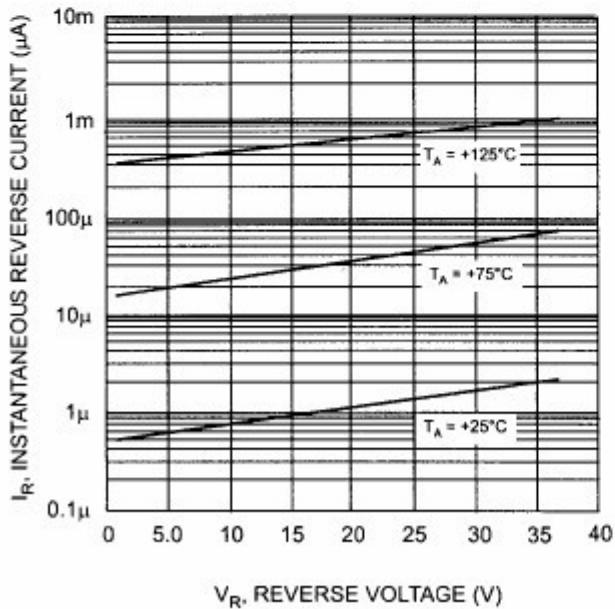


Fig. 3 Typical Reverse Characteristics


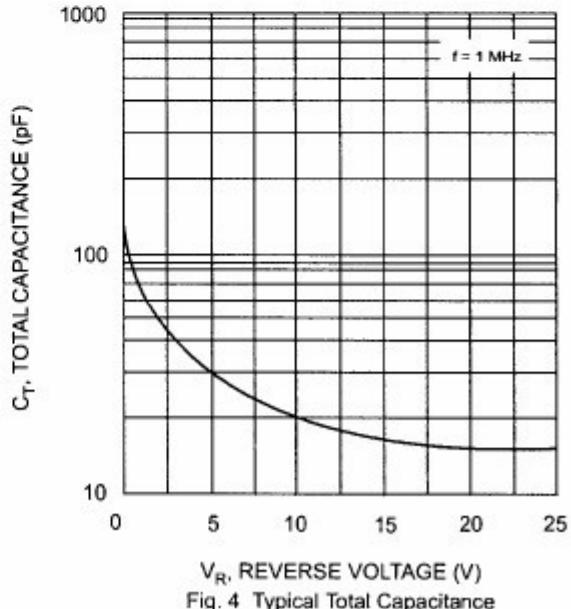


Fig. 4 Typical Total Capacitance vs. Reverse Voltage

## PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

**SOT-23**

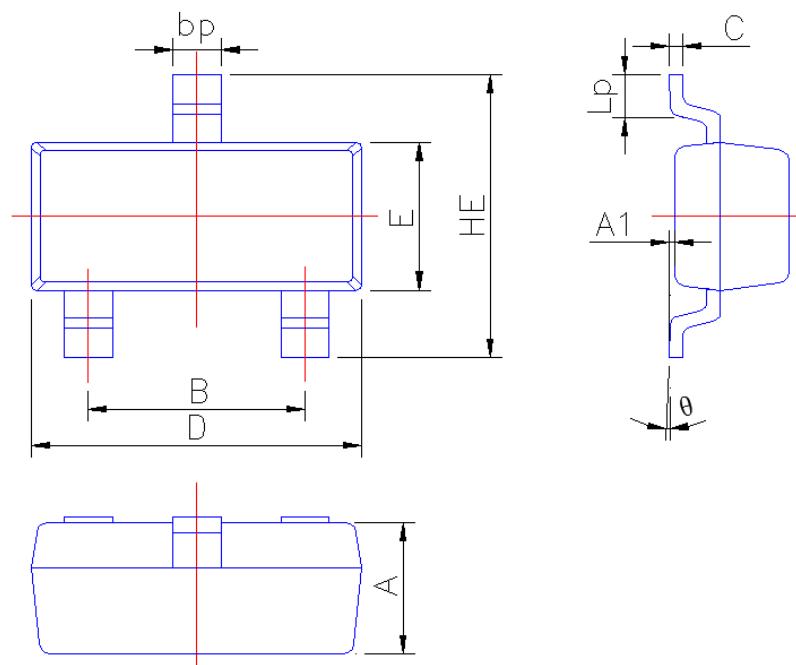

Symbol	Dimension in Millimeters	
	Min	Max
A	0.90	1.10
A1	0.013	0.100
B	1.80	2.00
bp	0.35	0.50
C	0.09	0.150
D	2.80	3.00
E	1.20	1.40
HE	2.20	2.80
Lp	0.20	0.50
θ	0°	5°