


Schottky Barrier Diode

Features

- Low forward voltage
- Small plastic SMD SOD-323 package

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

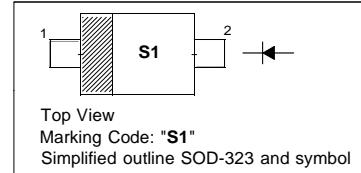

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	40	V
Forward Current	I_F	350	mA
Peak Forward Surge Current ($t_p = 10 \text{ ms}$)	I_{FSM}	2	A
Thermal Resistance from Junction Ambient	R_{thJA}	550	$^\circ\text{C/W}$
Maximum Operating Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-65 to +150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 25 \mu\text{A}$	$V_{(BR)R}$	40	-	V
Forward Voltage at $I_F = 0.1 \text{ mA}$ at $I_F = 1 \text{ mA}$ at $I_F = 10 \text{ mA}$ at $I_F = 50 \text{ mA}$ at $I_F = 200 \text{ mA}$ at $I_F = 500 \text{ mA}$	V_F	-	0.25	V
		-	0.3	
		-	0.4	
		-	0.5	
		-	0.75	
		-	0.9	
Reverse Current at $V_R = 1.5 \text{ V}$ at $V_R = 10 \text{ V}$ at $V_R = 20 \text{ V}$ at $V_R = 40 \text{ V}$	I_R	-	1 2 5 25	μA

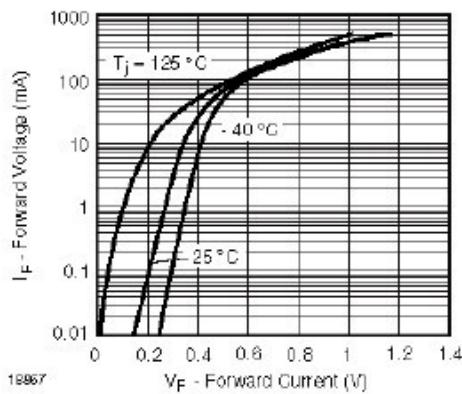


Figure 1. Typical Forward Voltage Forward Current at Various Temperatures

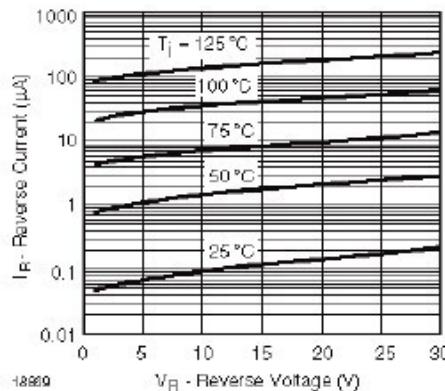


Figure 3. Typical Variation of Reverse Current at Various Temperatures


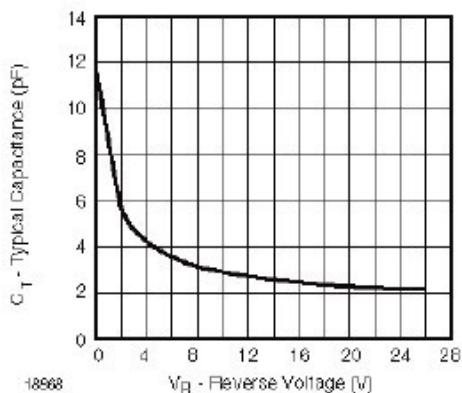


Figure 2. Typical Capacitance C vs. Reverse Applied Voltage V_R

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-323

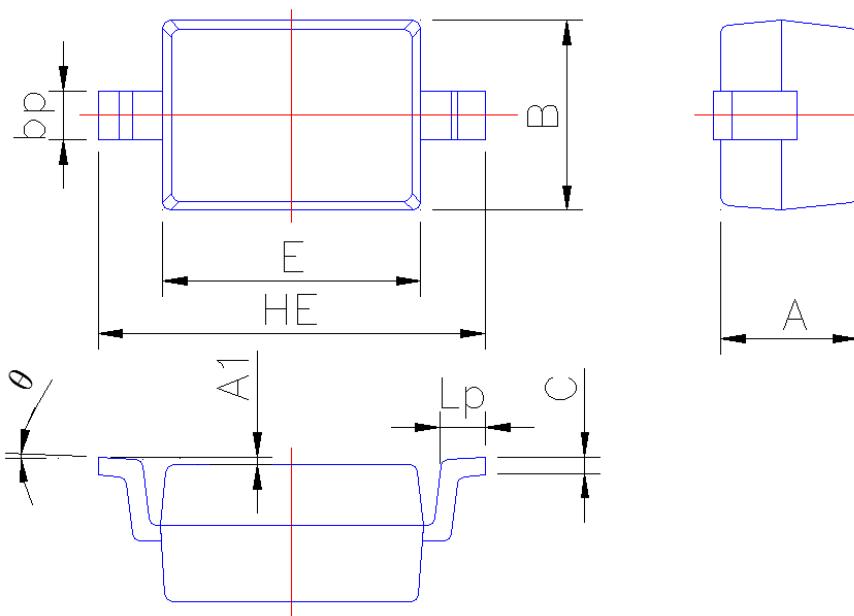

Symbol	Dimension in Millimeters	
	Min	Max
A	0.95	1.15
A1	0.010	0.100
B	1.20	1.40
bp	0.25	0.40
C	0.09	0.150
E	1.60	1.80
HE	2.30	2.70
Lp	0.20	0.40
θ	0°	5°