

# ESD5Z Series

## Transient Voltage Suppressors


for ESD Protection

### Features

- Excellent clamping capability
- Low leakage
- Fast response time

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode


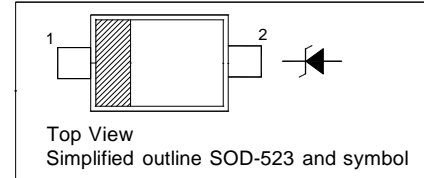


### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
IEC61000-4-2 (ESD) Air Contact	-	$\pm 30$ $\pm 30$	KV
IEC61000-4-4 (EFT)	-	40	A
ESD Voltage	Per Human Body Model	16	KV
	Per Machine Model	400	V
Power Dissipation on FR-5 Board	$P_{tot}$	200	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 150	$^\circ\text{C}$

### Characteristics at $T_a = 25\text{ }^\circ\text{C}$ ( $V_F = 1.1\text{ V Max. at } I_F = 10\text{ mA}$ )

Type	Marking Code	Reverse Stand-off Voltage	Reverse Current	Breakdown Voltage		Clamping Voltage			Reverse Peak Pulse Current	Peak Power Dissipation	Capacitance
		$V_{RWM}$	$I_R$ at $V_{RWM}$	$V_{BR}$	at $I_T$	$V_C$	at $I_{PP}$	$V_C$ at Max. $I_{PP}$	$I_{PP}$	$P_{pk}$	$C_i$
		Max. (V)	Max. ( $\mu\text{A}$ )	Min. (V)	(mA)	Typ. (V)	(A)	Max. (V)	Max. (A)	Max. (W)	Typ. (pF)
ESD5Z2V5	02	2.5	6	4	1	6.5	5	10.9	11	120	145
ESD5Z3V3	03	3.3	0.05	5	1	8.4	5	14.1	11.2	158	105
ESD5Z5V0	05	5	0.05	6.2	1	11.6	5	18.6	9.4	174	80
ESD5Z6V0	06	6	0.01	6.8	1	12.4	5	20.5	8.8	181	70
ESD5Z7V0	07	7	0.01	7.5	1	13.5	5	22.7	8.8	200	65
ESD5Z12	12	12	0.01	14.1	1	17	5	25	9.6	240	55

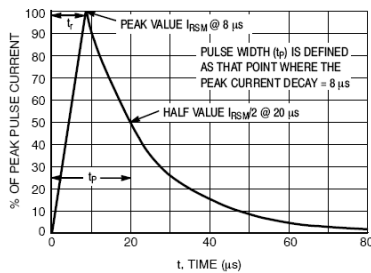




# ESD5Z Series

## PACKAGE OUTLINE

SOD-523

Plastic surface mounted package; 2 leads

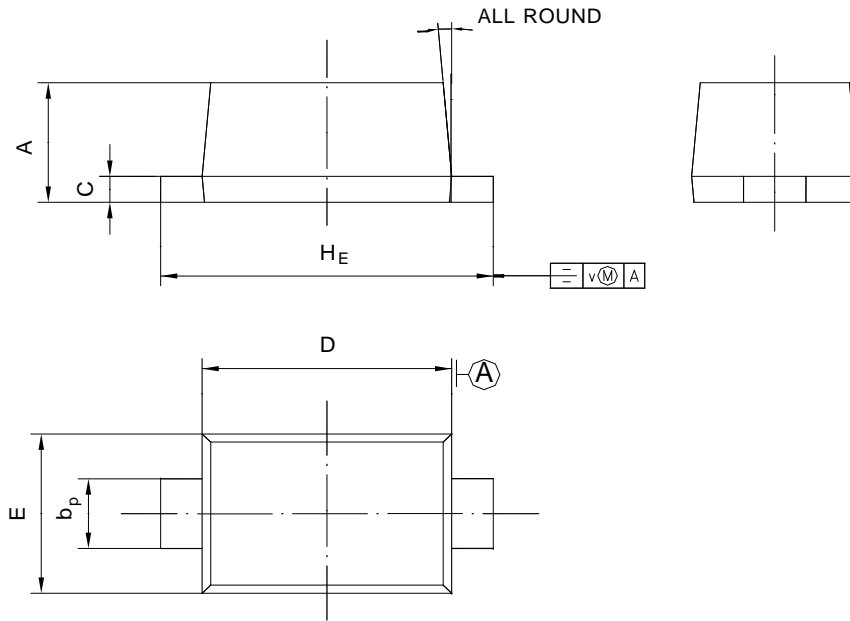

UNIT	A	b <sub>p</sub>	C	D	E	H <sub>E</sub>	V	
mm	0.70 0.60	0.4 0.3	0.135 0.100	1.25 1.15	0.85 0.75	1.7 1.5	0.1	5°