



## SILICON PLANAR ZENER DIODES

### Features

- Zener breakdown voltage range - 2.4 V to 75 V
- Package designed for optimal automated board assembly
- Small package size for high density applications



1. Cathode 2. Cathode 3. Anode  
SOT-23 Plastic Package

### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Power Dissipation	$P_D$	350	mW
Thermal Resistance, Junction to Ambient <sup>1)</sup>	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Junction and Storage Temperature Range	$T_j, T_S$	- 65 to + 150	$^\circ\text{C}$

<sup>1)</sup> Alumina = 0.4 X 0.3 X 0.024 in, 99.5% alumina

### Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 10\text{ mA}$	$V_F$	0.9	V




**Electrical Characteristics ( $T_a = 25\text{ }^\circ\text{C}$  unless otherwise noted)**


Type	Marking Code	Zener Voltage Range <sup>1)</sup>				Dynamic Resistance		Reverse Leakage Current	
		V <sub>Z</sub>			at I <sub>ZT</sub>	Z <sub>ZT</sub>	at I <sub>ZT</sub>	I <sub>R</sub>	at V <sub>R</sub>
		Nom. (V)	Min. (V)	Max. (V)	mA	Max. (Ω)	mA	Max. (μA)	V
BZX84B2V4CA	A31	2.4	2.35	2.45	5	100	5	50	1
BZX84B2V7CA	B31	2.7	2.65	2.75	5	100	5	20	1
BZX84B3V0CA	C31	3	2.94	3.06	5	95	5	10	1
BZX84B3V3CA	D31	3.3	3.23	3.37	5	95	5	5	1
BZX84B3V6CA	EW	3.6	3.53	3.67	5	90	5	5	1
BZX84B3V9CA	E31	3.9	3.82	3.98	5	90	5	3	1
BZX84B4V3CA	F31	4.3	4.21	4.39	5	90	5	3	1
BZX84B4V7CA	G31	4.7	4.61	4.79	5	80	5	3	2
BZX84B5V1CA	H31	5.1	5	5.2	5	60	5	2	2
BZX84B5V6CA	J31	5.6	5.49	5.71	5	40	5	1	2
BZX84B6V2CA	K31	6.2	6.08	6.32	5	10	5	3	4
BZX84B6V8CA	L31	6.8	6.66	6.94	5	15	5	2	4
BZX84B7V5CA	N31	7.5	7.35	7.65	5	15	5	1	5
BZX84B8V2CA	M31	8.2	8.04	8.36	5	15	5	0.7	5
BZX84B9V1CA	P31	9.1	8.92	9.28	5	15	5	0.5	6
BZX84B10CA	Q31	10	9.8	10.2	5	20	5	0.2	7
BZX84B11CA	R31	11	10.8	11.2	5	20	5	0.1	8
BZX84B12CA	S31	12	11.8	12.2	5	25	5	0.1	8
BZX84B13CA	T31	13	12.7	13.3	5	30	5	0.1	8
BZX84B15CA	U31	15	14.7	15.3	5	30	5	0.05	10.5
BZX84B16CA	V31	16	15.7	16.3	5	40	5	0.05	11.2
BZX84B18CA	W31	18	17.6	18.4	5	45	5	0.05	12.6
BZX84B20CA	X31	20	19.6	20.4	5	55	5	0.05	14
BZX84B22CA	Y31	22	21.6	22.4	5	55	5	0.05	15.4
BZX84B24CA	Z31	24	23.5	24.5	5	70	5	0.05	16.8
BZX84B27CA	A41	27	26.5	27.5	2	80	2	0.05	18.9
BZX84B30CA	B41	30	29.4	30.6	2	80	2	0.05	21
BZX84B33CA	C41	33	32.3	33.7	2	80	2	0.05	23.1
BZX84B36CA	D41	36	35.3	36.7	2	90	2	0.05	25.2
BZX84B39CA	E41	39	38.2	39.8	2	130	2	0.05	27.3
BZX84B43CA	F41	43	42.1	43.9	2	150	2	0.05	30.1
BZX84B47CA	G41	47	46.1	47.9	2	170	2	0.05	32.9
BZX84B51CA	H41	51	50	52	2	180	2	0.05	35.7
BZX84B56CA	J41	56	54.9	57.1	2	200	2	0.05	39.2
BZX84B62CA	K41	62	60.8	63.2	2	215	2	0.05	43.4
BZX84B68CA	L41	68	66.6	69.4	2	240	2	0.05	47.6
BZX84B75CA	M41	75	73.5	76.5	2	255	2	0.05	52.5

<sup>1)</sup> Tested with pulses  $t_p = 20\text{ ms}$ .


Temperature Coefficient

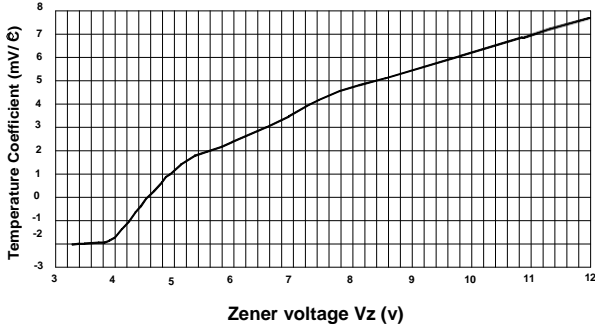



Temperature Coefficient

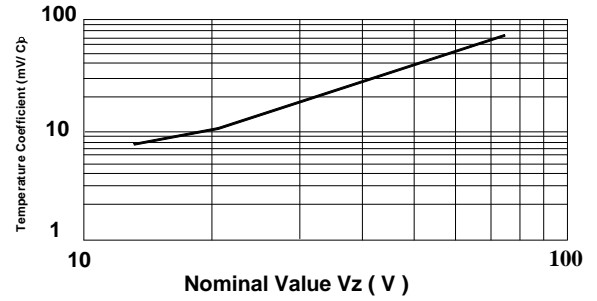

Power Derating Curve

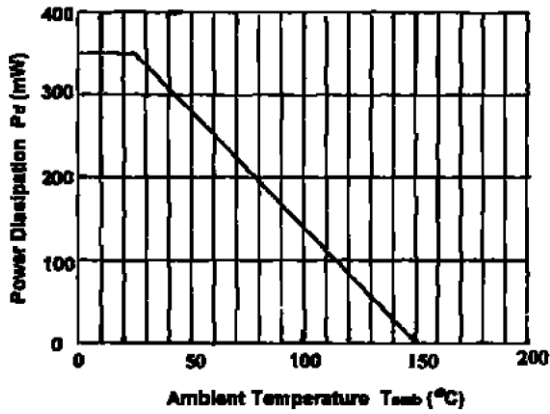

Typical Forward Voltage

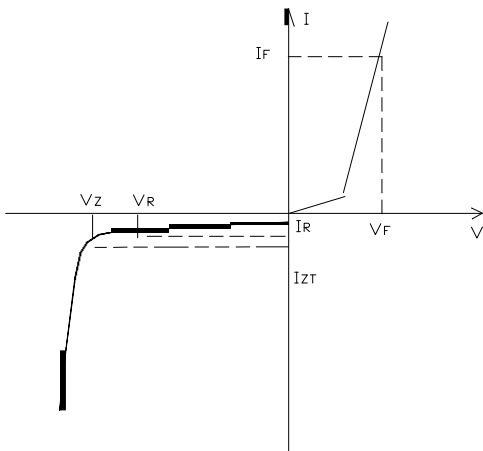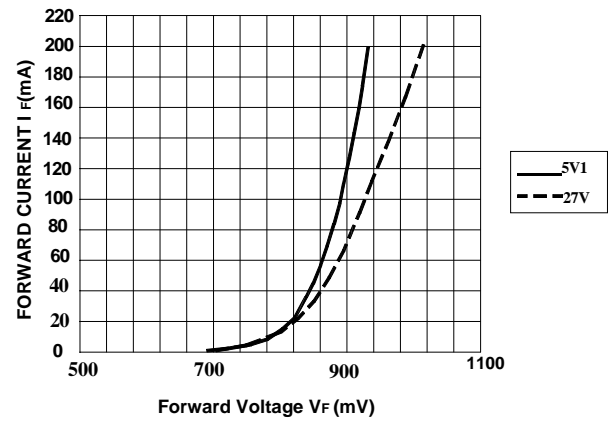


Zener Voltage Regulator



## PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

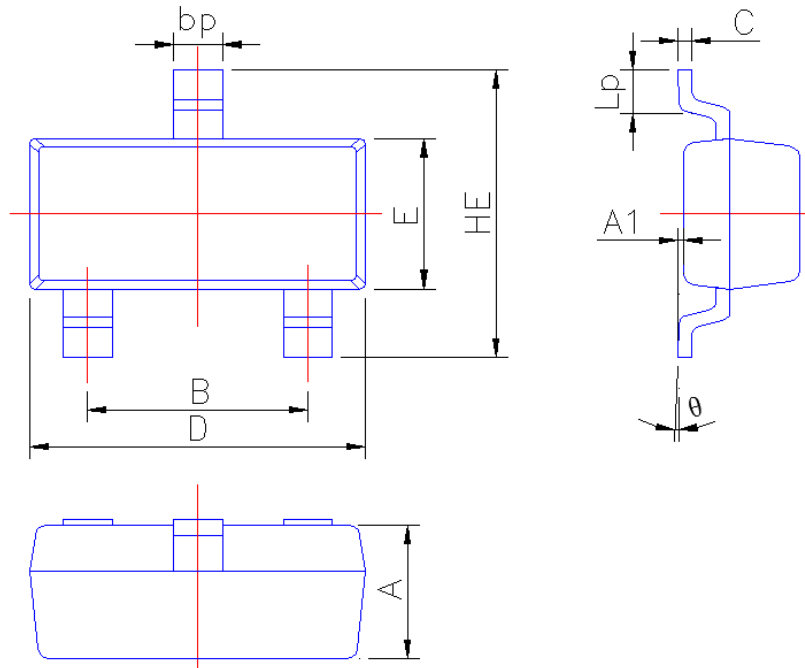

Symbol	Dimension in Millimeters	
	Min	Max
A	0.90	1.10
A1	0.013	0.100
B	1.80	2.00
bp	0.35	0.50
C	0.09	0.150
D	2.80	3.00
E	1.20	1.40
HE	2.20	2.80
Lp	0.20	0.50
$\theta$	0°	5°