



Silicon Planar Zener Diodes

This series of Zener diodes is offered in the convenient, surface mount plastic SOT-323 package. These devices are designed to provide voltage regulation with minimum space requirement. They are well suited for applications such as cellular phones, hand held portables, and high density PC boards.



SOT-323 Plastic Package

1. Anode 3. Cathode

Features

- Zener breakdown voltage range - 2.4 V to 75 V
- Package designed for optimal automated board assembly
- Small package size for high density applications

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

| Parameter | Symbol | Value | Unit |
|---|-----------------|---------------|--------------------|
| Power Dissipation | P_D | 200 | mW |
| Thermal Resistance, Junction to Ambient ¹⁾ | $R_{\theta JA}$ | 417 | $^\circ\text{C/W}$ |
| Junction and Storage Temperature Range | T_j, T_{stg} | - 65 to + 150 | $^\circ\text{C}$ |

¹⁾ Alumina = 0.4 X 0.3 X 0.024 in, 99.5% alumina



Electrical Characteristics ($T_a = 25\text{ }^\circ\text{C}$ unless otherwise noted, $V_F < 0.9\text{ V}$ at $I_F = 10\text{ mA}$)

| Type | Marking Code | Zener Voltage Range ¹⁾ | | | | Dynamic Impedance | | Reverse Current | |
|------------|--------------|-----------------------------------|----------|----------|-------------|-------------------|-------------|------------------------|----------|
| | | V_{ZT} | | | at I_{ZT} | Z_{ZT} | at I_{ZT} | I_R | at V_R |
| | | Nom. (V) | Min. (V) | Max. (V) | (mA) | Max. (Ω) | (mA) | Max. (μA) | (V) |
| BZX84C2V4W | EA | 2.4 | 2.2 | 2.6 | 5 | 100 | 5 | 50 | 1 |
| BZX84C2V7W | EB | 2.7 | 2.5 | 2.9 | 5 | 100 | 5 | 20 | 1 |
| BZX84C3V0W | EC | 3 | 2.8 | 3.2 | 5 | 95 | 5 | 10 | 1 |
| BZX84C3V3W | ED | 3.3 | 3.1 | 3.5 | 5 | 95 | 5 | 5 | 1 |
| BZX84C3V6W | EE | 3.6 | 3.4 | 3.8 | 5 | 90 | 5 | 5 | 1 |
| BZX84C3V9W | EF | 3.9 | 3.7 | 4.1 | 5 | 90 | 5 | 3 | 1 |
| BZX84C4V3W | EH | 4.3 | 4 | 4.6 | 5 | 90 | 5 | 3 | 1 |
| BZX84C4V7W | EJ | 4.7 | 4.4 | 5 | 5 | 80 | 5 | 3 | 2 |
| BZX84C5V1W | EK | 5.1 | 4.8 | 5.4 | 5 | 60 | 5 | 2 | 2 |
| BZX84C5V6W | EM | 5.6 | 5.2 | 6 | 5 | 40 | 5 | 1 | 2 |
| BZX84C6V2W | EN | 6.2 | 5.8 | 6.6 | 5 | 10 | 5 | 3 | 4 |
| BZX84C6V8W | EP | 6.8 | 6.4 | 7.2 | 5 | 15 | 5 | 2 | 4 |
| BZX84C7V5W | ER | 7.5 | 7 | 7.9 | 5 | 15 | 5 | 1 | 5 |
| BZX84C8V2W | EX | 8.2 | 7.7 | 8.7 | 5 | 15 | 5 | 0.7 | 5 |
| BZX84C9V1W | EY | 9.1 | 8.5 | 9.6 | 5 | 15 | 5 | 0.5 | 6 |
| BZX84C10W | EZ | 10 | 9.4 | 10.6 | 5 | 20 | 5 | 0.2 | 7 |
| BZX84C11W | FA | 11 | 10.4 | 11.6 | 5 | 20 | 5 | 0.1 | 8 |
| BZX84C12W | FB | 12 | 11.4 | 12.7 | 5 | 25 | 5 | 0.1 | 8 |
| BZX84C13W | FC | 13 | 12.4 | 14.1 | 5 | 30 | 5 | 0.1 | 8 |
| BZX84C15W | FD | 15 | 13.8 | 15.6 | 5 | 30 | 5 | 0.05 | 10.5 |
| BZX84C16W | FE | 16 | 15.3 | 17.1 | 5 | 40 | 5 | 0.05 | 11.2 |
| BZX84C18W | FF | 18 | 16.8 | 19.1 | 5 | 45 | 5 | 0.05 | 12.6 |
| BZX84C20W | FH | 20 | 18.8 | 21.2 | 5 | 55 | 5 | 0.05 | 14 |
| BZX84C22W | FJ | 22 | 20.8 | 23.3 | 5 | 55 | 5 | 0.05 | 15.4 |
| BZX84C24W | FK | 24 | 22.8 | 25.6 | 5 | 70 | 5 | 0.05 | 16.8 |
| BZX84C27W | FM | 27 | 25.1 | 28.9 | 2 | 80 | 2 | 0.05 | 18.9 |
| BZX84C30W | FN | 30 | 28 | 32 | 2 | 80 | 2 | 0.05 | 21 |
| BZX84C33W | FP | 33 | 31 | 35 | 2 | 80 | 2 | 0.05 | 23.1 |
| BZX84C36W | FR | 36 | 34 | 38 | 2 | 90 | 2 | 0.05 | 25.2 |
| BZX84C39W | FX | 39 | 37 | 41 | 2 | 130 | 2 | 0.05 | 27.3 |
| BZX84C43W | FY | 43 | 40 | 46 | 2 | 150 | 2 | 0.05 | 30.1 |
| BZX84C47W | FZ | 47 | 44 | 50 | 2 | 170 | 2 | 0.05 | 32.9 |
| BZX84C51W | KA | 51 | 48 | 54 | 2 | 180 | 2 | 0.05 | 35.7 |
| BZX84C56W | KB | 56 | 52 | 60 | 2 | 200 | 2 | 0.05 | 39.2 |
| BZX84C62W | KC | 62 | 58 | 66 | 2 | 215 | 2 | 0.05 | 43.4 |
| BZX84C68W | KD | 68 | 64 | 72 | 2 | 240 | 2 | 0.05 | 47.6 |
| BZX84C75W | KE | 75 | 70 | 79 | 2 | 255 | 2 | 0.05 | 52.5 |

¹⁾ Tested with pulses $t_p = 20\text{ ms}$.



CHINA BASE
INTERNATIONAL


SOT-323




BZX84C2V4W-BZX84C75W

www.china-base.com.hk


Temperature Coefficient

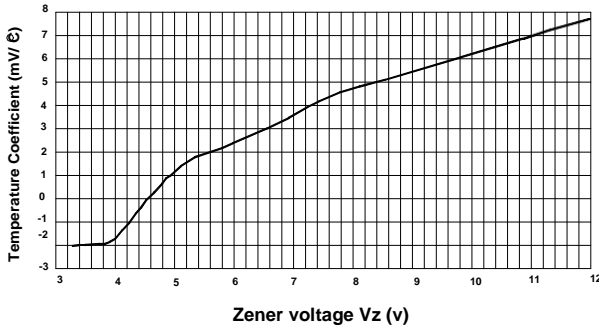



Temperature Coefficient

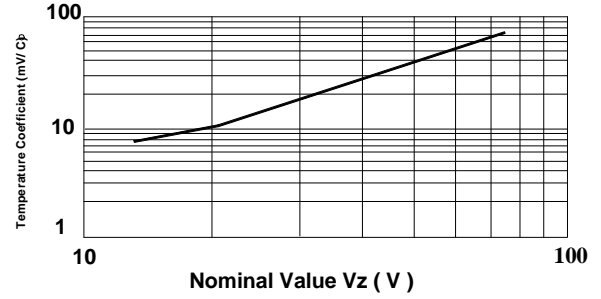

Power Derating Curve

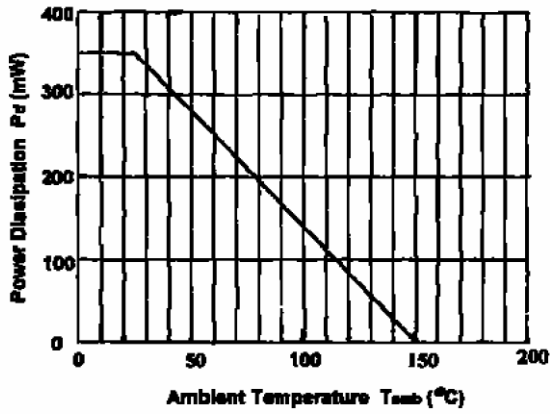

Typical Forward Voltage

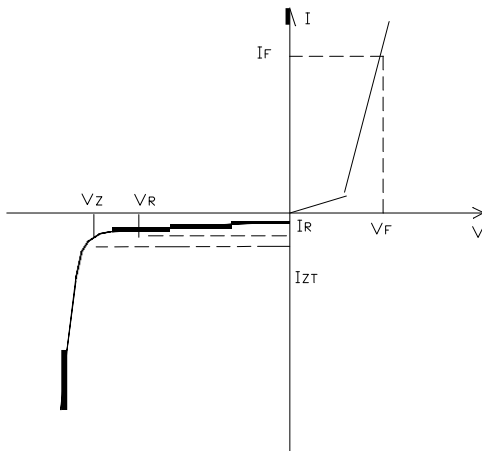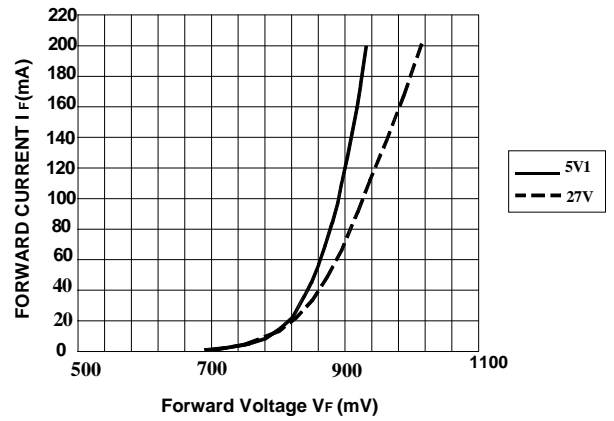


Zener Voltage Regulator



PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-323

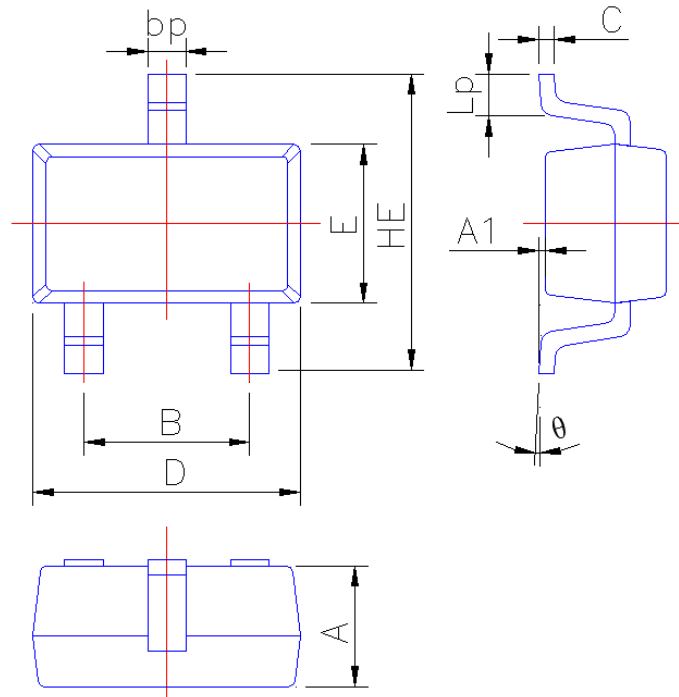

| Symbol | Dimension in Millimeters | |
|----------|--------------------------|-------|
| | Min | Max |
| A | 0.90 | 1.00 |
| A1 | 0.010 | 0.100 |
| B | 1.20 | 1.40 |
| bp | 0.25 | 0.45 |
| C | 0.09 | 0.15 |
| D | 2.00 | 2.20 |
| E | 1.15 | 1.35 |
| HE | 2.15 | 2.55 |
| Lp | 0.25 | 0.46 |
| θ | 0° | 6° |