




Digital Transistors (Built-in Resistors)

• Equivalent Circuit DIGITAL TRANSISTOR (NPN)

FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

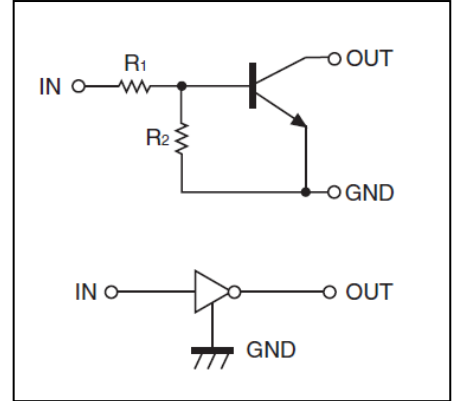

PIN CONNENCTIONS and MARKING

<p>DTC143XE</p> <p>SOT-523</p> <p>1. IN 2. GND 3. OUT</p>	<p>DTC143XUA</p> <p>SOT-323</p> <p>1. IN 2. GND 3. OUT</p>
<p>DTC143XKA</p> <p>SOT-23-3L</p> <p>1. IN 2. GND 3. OUT</p>	<p>DTC143XCA</p> <p>SOT-23</p> <p>1. IN 2. GND 3. OUT</p>

ORDERING INFORMATION

Part Number	MARKING	Package	Packing Method	Pack Quantity
DTC143XE	43	SOT-523	Reel	3000pcs/Reel
DTC143XUA	43	SOT-323	Reel	3000pcs/Reel
DTC143XKA	43	SOT-23-3L	Reel	3000pcs/Reel
DTC143XCA	43	SOT-23	Reel	3000pcs/Reel



MAXIMUM RATINGS(Ta=25°C unless otherwise noted)







Symbol	Parameter	Limits(DTC143X□)				Unit
		E	UA	CA	KA	
V _{CC}	Supply Voltage	50				V
V _{IN}	Input Voltage	-7~+20				V
I _O	Output Current	100				mA
P _D	Power Dissipation	150	200	200	200	mW
T _J ,T _{stg}	Operation Junction and Storage Temperature Range	-55~+150				°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	V _{I(off)}	V _{CC} =5V,I _O =100μA	0.3			V
	V _{I(on)}	V _O =0.3V,I _O =20mA			2.5	V
Output voltage	V _{O(on)}	I _O /I _I =10mA/0.5mA		0.1	0.3	V
Input current	I _I	V _I =5V			1.8	mA
Output current	I _{O(off)}	V _{CC} =50V,V _I =0			0.5	μA
DC current gain	G _I	V _O =5V,I _O =10mA	30			
Input resistance	R ₁		3.29	4.7	6.11	kΩ
Resistance ratio	R ₂ /R ₁		1.7	2.1	2.6	
Transition frequency	f _T	V _O =10V,I _O =5mA,f=100MHz		250		MHz



Typical Characteristics

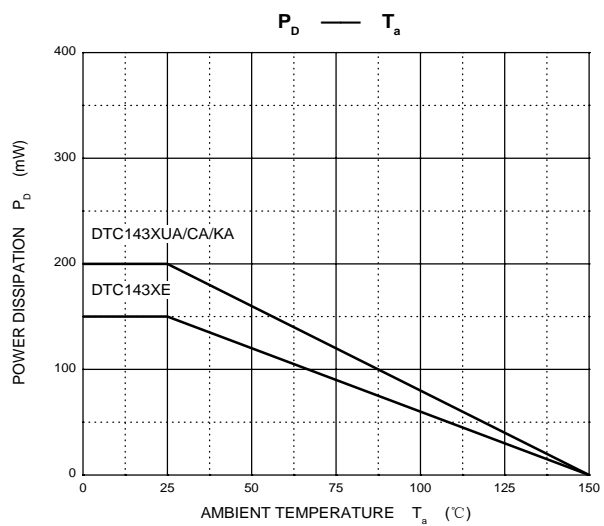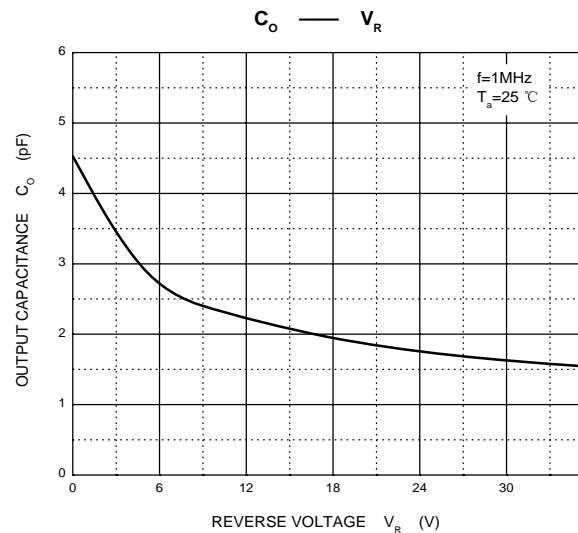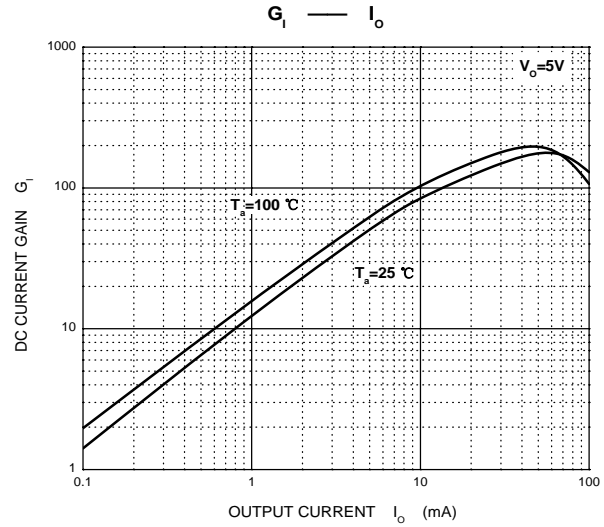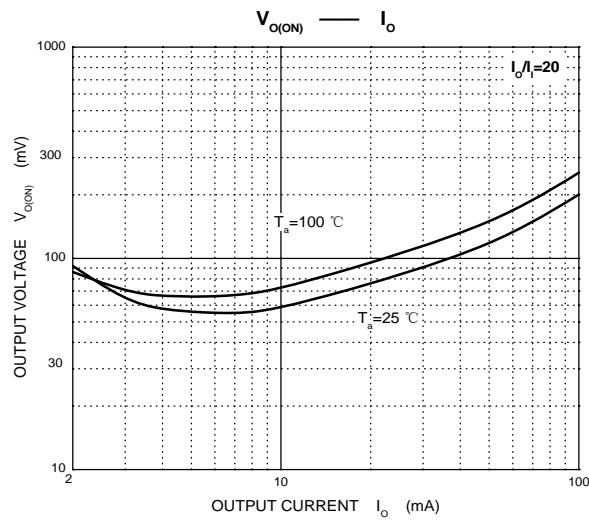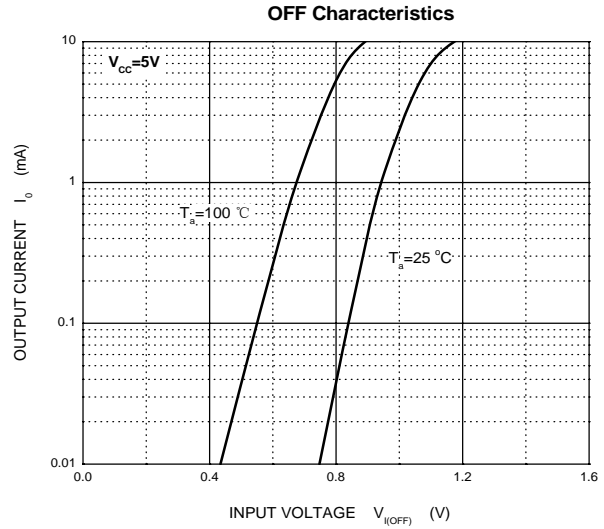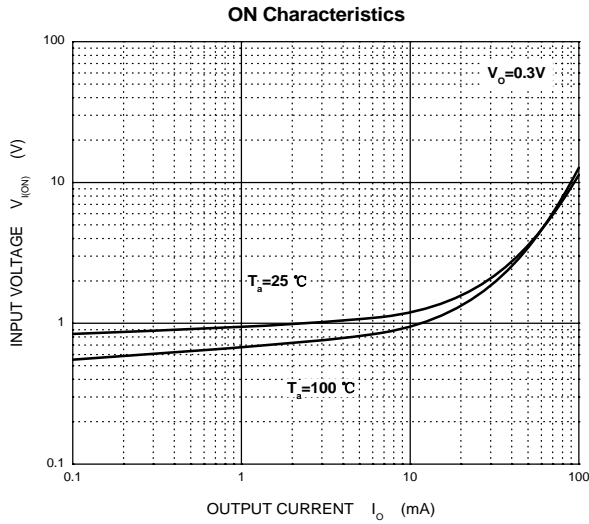




PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-523

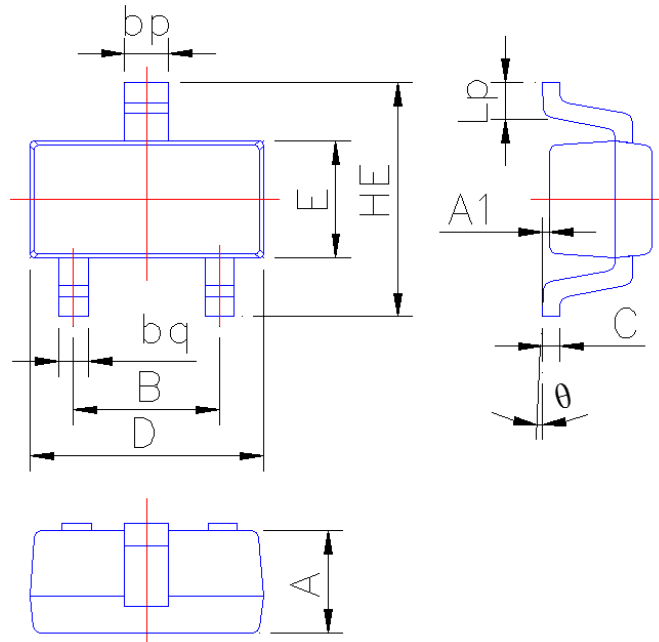


Symbol	Dimension in Millimeters	
	Min	Max
A	0.60	0.80
A1	0.010	0.100
B	0.95	1.05
bp	0.26	0.40
bq	0.16	0.30
C	0.09	0.15
D	1.50	1.70
E	0.70	0.85
HE	1.45	1.75
Lp	0.16	0.36
θ	0°	5°



PACKAGE OUTLINE

Plastic surface mounted package; 3 leads


SOT-323

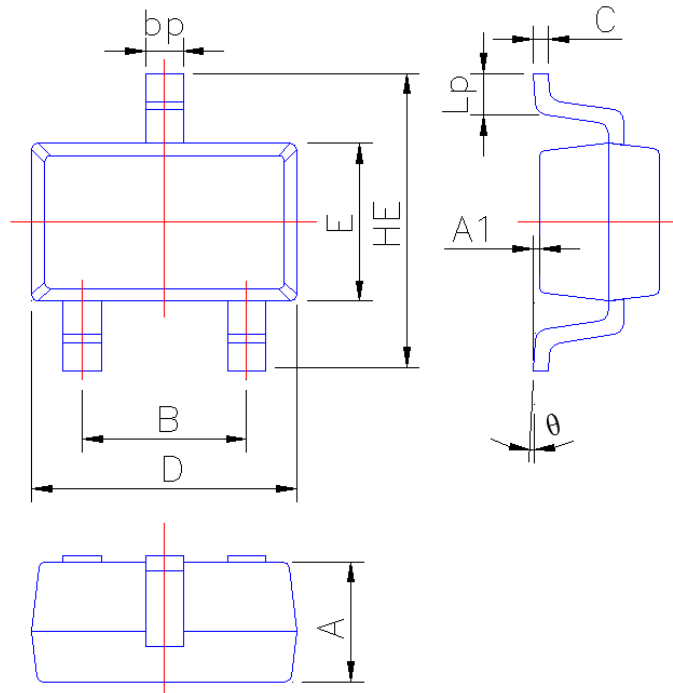

Symbol	Dimension in Millimeters	
	Min	Max
A	0.90	1.00
A1	0.010	0.100
B	1.20	1.40
bp	0.25	0.45
C	0.09	0.15
D	2.00	2.20
E	1.15	1.35
HE	2.15	2.55
Lp	0.25	0.46
θ	0°	6°



Package outline dimensions SOT23-3L

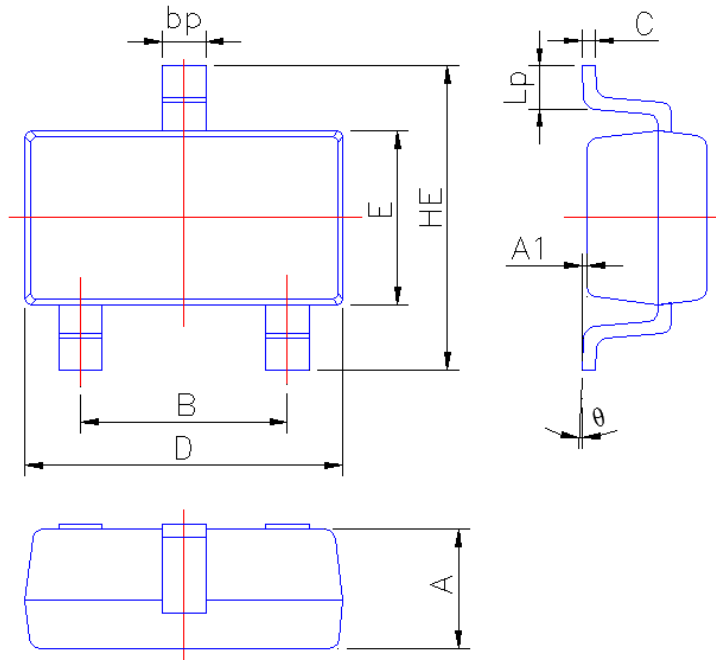


Symbol	Dimension in Millimeters	
	Min	Max
A	1.05	1.20
A1	0.010	0.100
B	1.80	2.00
bp	0.35	0.50
C	0.09	0.15
D	2.80	3.00
E	1.50	1.70
HE	2.60	3.00
Lp	0.25	0.55
θ	2°	6°



PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

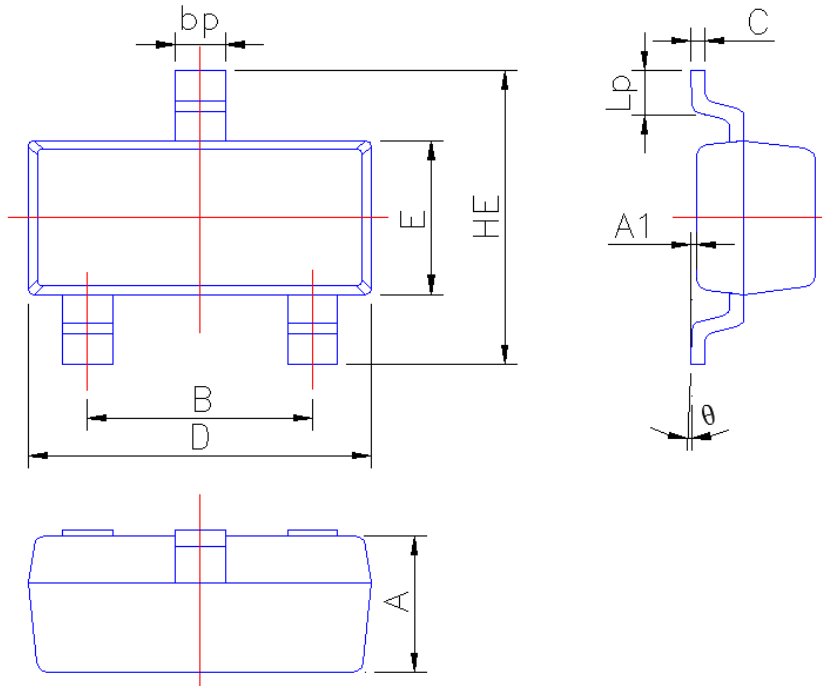

Symbol	Dimension in Millimeters	
	Min	Max
A	0.90	1.10
A1	0.013	0.100
B	1.80	2.00
bp	0.35	0.50
C	0.09	0.150
D	2.80	3.00
E	1.20	1.40
HE	2.20	2.80
Lp	0.20	0.50
θ	0°	5°