


NPN Silicon Epitaxial Planar Transistor

for microwave low noise amplifier at VHF, UHF and CATV band

The transistor is subdivided into three groups, Q, R and S, according to its DC current gain.



1. Emitter 2. Base 3. Collector
SOT-23 Plastic Package

HFE	MARKING
Q	R23
R	R24
S	R25

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	20	V
Collector Emitter Voltage	V_{CEO}	12	V
Emitter Base Voltage	V_{EBO}	3	V
Collector Current	I_C	100	mA
Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_s	- 65 to + 150	$^\circ\text{C}$

Characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 10\text{ V}$, $I_C = 20\text{ mA}$ Current Gain Group	Q h_{FE}	50	-	100	-
	R h_{FE}	80	-	160	-
	S h_{FE}	125	-	250	-
Collector Cutoff Current at $V_{CB} = 10\text{ V}$	I_{CBO}	-	-	1	μA
Emitter Cutoff Current at $V_{EB} = 1\text{ V}$	I_{EBO}	-	-	1	μA
Gain Bandwidth Product at $V_{CE} = 10\text{ V}$, $I_C = 20\text{ mA}$	f_T	-	7	-	GHz
Feed-Back Capacitance at $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	$C_{re}^{1)}$	-	0.55	1	pF
Noise Figure at $V_{CE} = 10\text{ V}$, $I_C = 7\text{ mA}$, $f = 1\text{ GHz}$	NF	-	1.1	2	dB

1) The emitter terminal and the case shall be connected to the guard terminal of the three-terminal capacitance bridge.









CHINA BASE
INTERNATIONAL

SOT-23



MMBTSC3356N-7G

www.china-base.com.hk

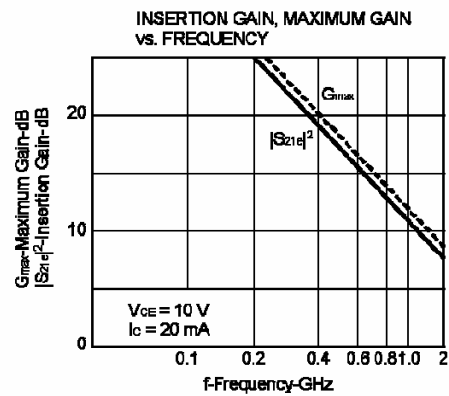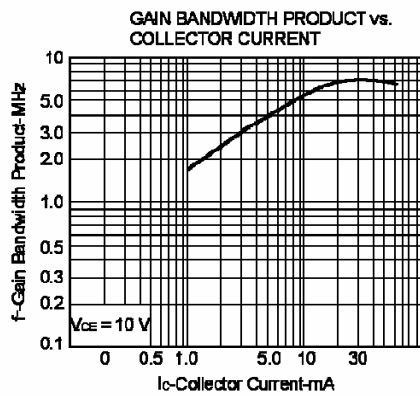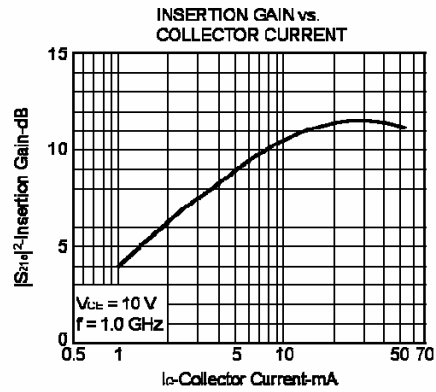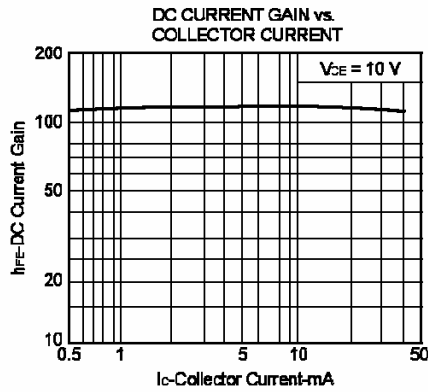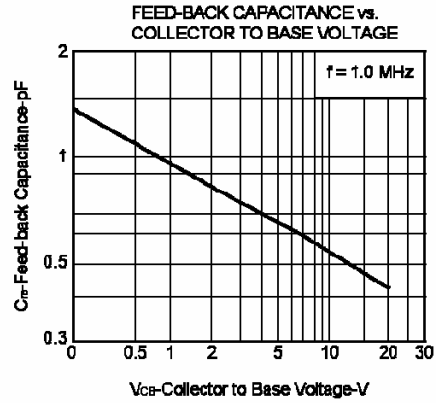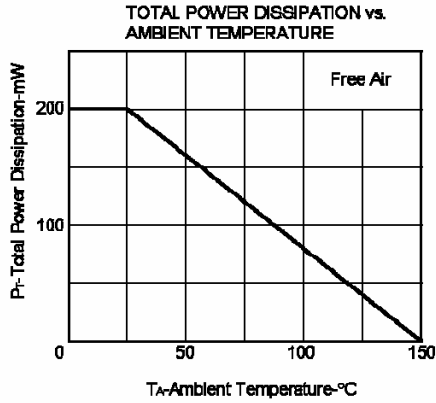




PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

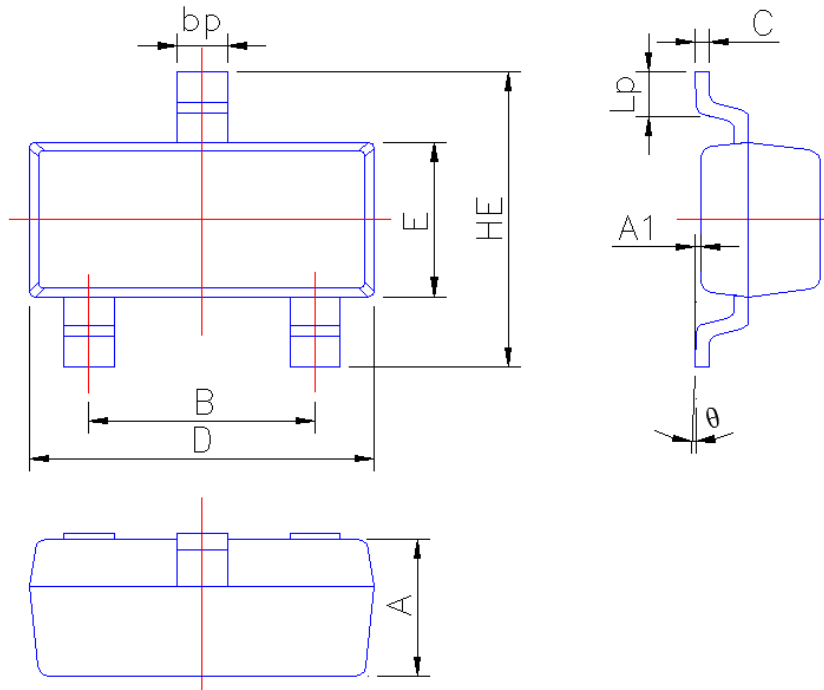

Symbol	Dimension in Millimeters	
	Min	Max
A	0.90	1.10
A1	0.013	0.100
B	1.80	2.00
bp	0.35	0.50
C	0.09	0.150
D	2.80	3.00
E	1.20	1.40
HE	2.20	2.80
Lp	0.20	0.50
θ	0°	5°