


## NPN Silicon Epitaxial Planar Transistor

for switching and amplifier applications.  
Especially suitable for AF-driver stages  
and low power output stages.



The transistor is subdivided into two groups C and D according to its DC current gain.

1.Base 2.Emitter 3.Collector  
SOT-23 Plastic Package

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Collector Base Voltage	$V_{CBO}$	40	V
Collector Emitter Voltage	$V_{CEO}$	25	V
Emitter Base Voltage	$V_{EBO}$	6	V
Collector Current	$I_C$	2	A
Power Dissipation	$P_{tot}$	350	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_s$	- 55 to + 150	$^\circ\text{C}$



### Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $V_{CE} = 1 \text{ V}$ , $I_C = 5 \text{ mA}$ at $V_{CE} = 1 \text{ V}$ , $I_C = 100 \text{ mA}$ at $V_{CE} = 1 \text{ V}$ , $I_C = 1.5 \text{ A}$	$h_{FE}$	45	-	-
	$h_{FE}$	100	250	-
	$h_{FE}$	160	300	-
	$h_{FE}$	40	-	-
Collector Base Cutoff Current at $V_{CB} = 35 \text{ V}$	$I_{CBO}$	-	100	nA
Emitter Base Cutoff Current at $V_{EB} = 6 \text{ V}$	$I_{EBO}$	-	100	nA
Collector Base Breakdown Voltage at $I_C = 100 \mu\text{A}$	$V_{(BR)CBO}$	40	-	V
Collector Emitter Breakdown Voltage at $I_C = 2 \text{ mA}$	$V_{(BR)CEO}$	25	-	V
Emitter Base Breakdown Voltage at $I_E = 100 \mu\text{A}$	$V_{(BR)EBO}$	6	-	V
Collector Emitter Saturation Voltage at $I_C = 1.5 \text{ A}$ , $I_B = 100 \text{ mA}$	$V_{CE(sat)}$	-	0.5	V
Base Emitter Saturation Voltage at $I_C = 1.5 \text{ A}$ , $I_B = 100 \text{ mA}$	$V_{BE(sat)}$	-	1.2	V
Base Emitter Voltage at $V_{CE} = 1 \text{ V}$ , $I_C = 10 \text{ mA}$	$V_{BE(on)}$	-	1	V
Transition Frequency at $V_{CE} = 10 \text{ V}$ , $I_C = 50 \text{ mA}$	$f_T$	100	-	MHz

## PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

**SOT-23**

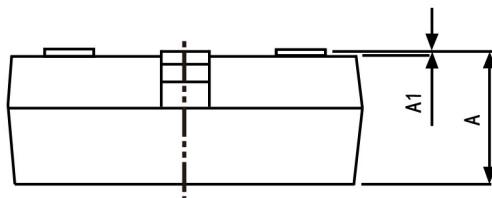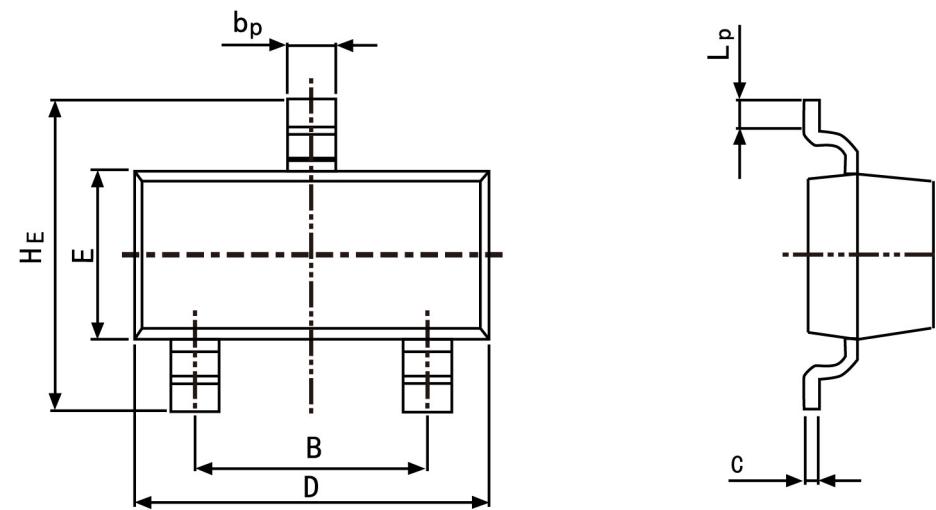

Symbol	Dimension in Millimeters	
	Min	Max
A	0.95	1.40
B	1.78	2.04
bp	0.35	0.50
C	0.08	0.19
D	2.70	3.10
E	1.20	1.65
HE	2.20	3.00
A1	0.100	0.013
Lp	0.20	0.50